


4.2 Array and for-loop

Description

A customer may have more than one account. In this section, we extend class `Customer` to keep track of the accounts of a given customer.

We may use class `Set` for this purpose, but we use this example to introduce `Array`, which is another common collection object. An `Array`-object is an indexed sequence of references to objects where each reference in the sequence may be denoted by an integer index.



Accounts Array

Class `Array` is defined as follows:

```

class Array(range: var integer, class ElmType: < Object):
  put(R: ref ElmType): at[index: var integer]:
  ...
  get(index: var integer) -> R: ref ElmType:
  ...

```

- The first parameter, `range` of `Array` is the number of elements in the `Array`.
- The second parameter, `ElmType`, is the type of the elements in the `Array` – similar to `ElmType` for class `Set`.
- It has a method `put: at` with two parameters `R` and `index`. This method stores the reference at the position given by the value of `index`.
- It has a method `get`, which returns the reference stored at the position given by the parameter `index`.
- As can be seen, `put: at` and `get` use another syntax for defining parameters than the one we have seen in previous examples using standard brackets and comma to separate the parameters. This syntax is explained in section .

The following example shows how we may use an `Array`-object, `accounts`. Below we add `accounts` as an attribute of class `Customer`, but first we show how to use `Array` by means of a ghost object.

```

aGhost1: obj
  accounts: obj Array(3, Account)
  anAccountA, anAccountB : ref Account
  JohnSmithProfile: ref Customer      -- skal vi bruge obj her?

JohnSmithProfile := Customer("John Smith")
anAccountA := Account(JohnSmithProfile)
accounts.put(anAccountA): at[2]
anAccountB := accounts.get[2]


```

- The first item in the example above declares an `Array`-object with 3 elements (the first parameter) of type `Account` (the second parameter).
- The statement `accounts.put(anAccountA): at[2]` inserts the `Account` referred to by `anAccountA` as the second element in the array.

- The statement `anAccountB := accounts.get[2]` assigns the second element in the array to the reference `anAccountB`.

The situation at the end of `aGhost1` is shown in the snapshot:

Image not found or type unknown

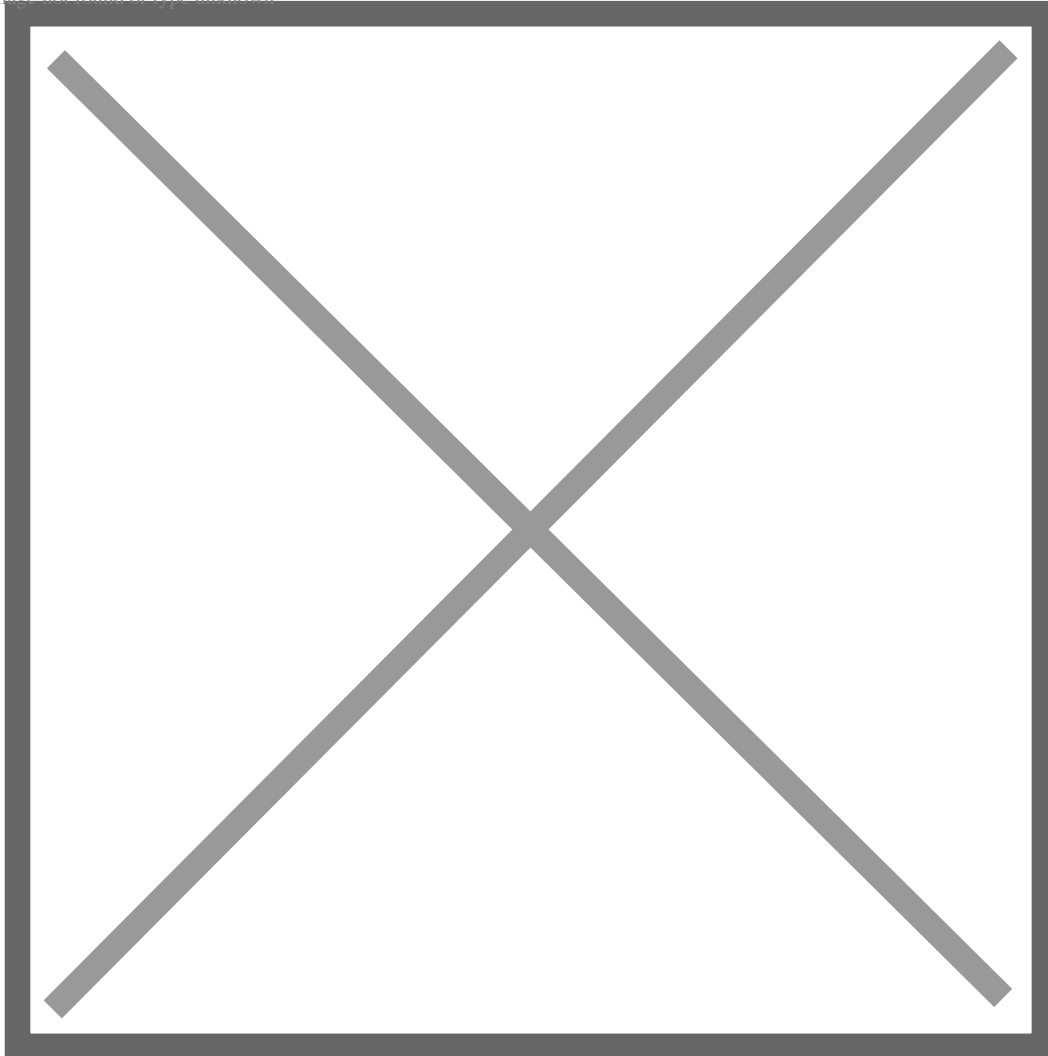

Accounts Array Example

An index may in general be an expression that evaluate to an integer value as shown in the ghost object below:

```
aGhost2: obj
  accounts: obj Array(3, Account)
  anAccountA, anAccountB, anAccountC : ref Account
  inx: var integer
  ... -- some code assigning references to anAccountA and anAccountB
  inx := 1
  accounts.put(anAccountA):at[inx]
  accounts.put(anAccountB):at[inx + 1]
  inx := 3
  anAccountC := accounts.get[inx - 2]
```

- The object `aGhost2` has an `Array` `accounts` with 3 elements of type `Account`, three reference variables `anAccountA`, `anAccountB`, and `anAccountC`, and an integer variable `inx`.
- The three dots `...` stand for code not shown – see chapter .

- The variable `inx` assigned the value 1.
- The expression `accounts.put(anAccountA):at[inx]` assigns the reference hold by `anAccountA` to element no. 1 in `accounts`, since the value of `inx` is 1.
- The expression `accounts.put(anAccountB):at[inx + 1]` assigns the reference hold by `anAccountB` to element no. 2 in `accounts`, since expression `inx + 1` has the value 2.
- The statement `anAccountC := accounts.get[inx - 2]` assigns element no. 1 in `accounts` to `anAccountC` since expression `inx - 2` has the value 3 (as `inx` is assigned the value 3 before the statement) – `anAccountC` will thus refer to the same object as `anAccountA`.

If the index expression is not within the range of the array – here 1-3, the program execution will be terminated (aborted) with an error message saying that there is an index error.

We may now extend class `Customer` with an array keeping track of the accounts of the customer:

```
class Customer(name: var String):
  addr: var String
  email: var String
  maxNoOfAccounts: val 10
  noOfAccounts: var integer
  accounts: obj Array(maxNoOfAccounts, Account)
```

In the example, we assume that a customer may have at most 10 accounts as represented by the constant integer value `maxNoOfAccounts`. The integer variable `noOfAccounts` holds the number of accounts of the customer. An integer variable like `noOfAccounts` has initially the value 0 (zero).

Next we add a method `addAccount` to class `Customer`:

```
class Customer(name: var String):
  "-"
  addAccount(acc: ref Account):
    noOfAccounts := noOfAccounts + 1
    if (noOfAccounts <= maxNoOfAccounts) :then
      accounts.put(acc):at[noOfAccounts]
    :else
      console.print("Cannot add Account")
```

The method has a parameter `acc` referring to the `Account` to be added. An `if:then:else` statement is used to test if it is possible to add an account or if the limit of the maximum number of accounts has been reached in which case a message is printed on the console.

The `if:then:else` statement is similar to the `if:then` statement as explained in section . The part after `else` is executed if the condition is false. For a more detailed description see section on statements.

Next we add a method that calculates the sum of the balance on all accounts:

```
class Customer(name: var String):
  "-"
  balanceSum -> bal: var float:
    for (1):to(noOfAccounts):repeat
      bal := bal + accounts.get[inx].balance
```

The method makes use of a *for-statement*, `for:to:repeat` – also called *for-loop*, that iterates through the elements of the array. For each value in the interval `1..noOfAccounts`, the statement `bal := bal + accounts.get[inx].balance` is executed. The variable `inx` has the value 1 in the first execution 2 in the second and so one and `noOfAccounts` in the last execution. For a more detailed description see section .

The complete new version of class `Customer` is shown here:

```
class Customer(name: var String):
  addr: var String
  email: var String
  maxNoOfAccounts: val 10
  noOfAccounts: var integer
```

```
accounts: obj Array(maxNoOfAccounts,Account)

addAccount(acc: ref Account):
  noOfAccounts := noOfAccounts + 1
  if (noOfAccounts <= maxNoOfAccounts) :then
    accounts.put(acc):at[noOfAccounts]
  :else
    console.print("Cannot add Account")

balanceSum -> bal: var float:
  for(1):to(noOfAccounts):repeat
    bal := bal + accounts.get[inx].balance
```

Array literal bør indføres her, men mangler et oplagt eksempel. Kan selvfølgelig bare vise et demo eksempel med fx 3 Accounts a la `accounts := (acc1,acc2,acc3)` men ikke ideelt.